


Insulation Boards

EXPANDED POLYSTYRENE

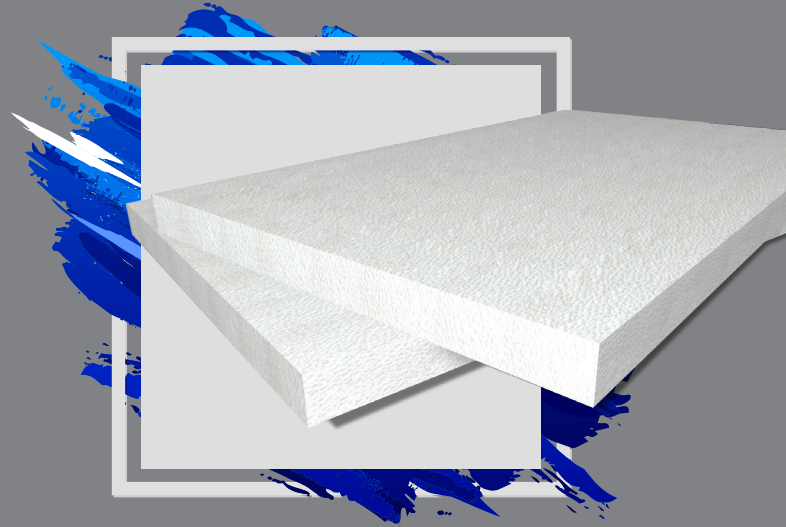

EXPANDED POLYSTYRENE (EPS) THERMAL INSULATION SHEETS

Styroking is a closed cell expanded polystyrene manufactured by the process of moulding followed by cutting in cnc machines. It is available in density from 10-50 kg/m³ in Normal and Fire Retardant Grades. Different sizes and shapes are available as per customer's requirement.

Styroking with DCL mark is approved by Dubai Central Laboratory/ Dubai Municipality Building Section as per the international standard ASTM C578/ Building Material Code 75.00 Series and standard Organization for GCC (GSO 1014/1998).

Styroking with Emirates Quality Mark is approved by Emirates Authority for Standardization and Metrology (ESMA). EPS has zero ODP (Ozone Depletion Potential) and Minimum Global Warming Potential (GWP)

PRODUCT DESCRIPTION

Styroking
Expanded Polystyrene (EPS) Thermal
Insulation Sheets and Blocks

DIMENSIONS (L X B X T)

600 x 125 x 1 - 100cm
600 x 100 x 1 - 100 cm
400 x 125 x 1 - 100cm
400 x 100 x 1 - 100cm
250 x 125 x 1 - 100cm
230 x 100 x 1 - 100cm
300 x 100 x 1 - 60cm
200 x 100 x 1 - 50cm



*Other sizes and shapes are available upon customers request

APPLICATIONS

Roof and Floor Insulation Systems: Conventional roofing, Inverted Membrane Roofing, Insulated Hourdi Roofing and Profiled Insulated Metal Roofing.

Wall Insulations Systems: Single Wall System, Double Wall System, Precast Wall System, Profiled Insulated Metal Panels, Vibration Isolation and Foundation Walls.



LOCATION

Al Waab City – Salwa Road, 1st Floor, Office No.A, Above HSBC Bank
P.O. Box: 23910 Doha-Qatar
Phone: Tel : +974 4451 3301/02/03
Fax: +974 4451 3305
Email: contact@unitech-qatar.com

