

Sealants Adhesives & Chemicals to Filler Board

BACKING RODS



DESCRIPTION

UNIPRO Closed-Cell Backer-Rod is a closed-cell, polyethylene foam joint filler and backing for elastomeric sealants.

Its resilience accommodates dynamic joints.

COMPLIANCES

- ASTM C 1330, Type C

SIZES

- Ø 5 to 50mm

BENEFITS

- Low moisture absorption
- Installs easily and quickly
- Accepts joint movement
- Will not discolor sealants or substrates
- Compatible with cold-applied sealants
- Gives proper shape to sealant for effective function
- Requires no additional bondbreaker

FEATURES

Closed-CELL Backer-rod

- Closed-cell polyethylene foam
- Lightweight
- Resilient
- Nonimpregnated, nonstaining, and nonbleeding
- Inert
- Round
- Nonadhering to sealants

WHERE TO USE

Application

- Backing for sealants
- Precast panel joints
- Expansion joints
- Window-and door-frame perimeters
- Coping joints
- Glazing joints
- Isolation joints
- Control joints



BACKING RODS

TECHNICAL DATA

Properties	Test method
Color	White/Grey
Density	35Kg /cm3 approx.
Service Temperature	-70 ° C to 90 ° C under normal usage
Weather Resistance	Will be degraded by prolonged exposure to U.V.
Heat Shrinkage	< 1 % (after 96 hours at 80 ° C)
Storage Requirements	Store flat, preferably under cover
Minimum Closed Cell	> 97%
Thermal Coefficient	0.035 Kcal/mh ° C @ 20 ° C / 0.04 W/M ° C @ 20 ° C
Ageing Stability	No structural change after 10 thermal cycles (-70 to 90 ° C)
Water Vapour Transmission	< 4 g/sqm/24 hours/50mm
Water Absorption	< 1% V/V after 24 hours total immersion
Tear Strength	10 N/sq cm (average based on 10mm)
Flammability	Will burn with very low toxic fumes and smoke emission (Carbon Dioxide and water vapour approx. 99% of combustion products).
Toxicity	Non-toxic under normal conditions of use.

HOW TO APPLY

application


- Joint filters have three major functions:
 - To control the depth of the sealant in proportion to joint width
 - To provide backing against which the sealant is applied, forcing the sealant to the sides of the joint
 - To prevent side bonding ensuring proper functioning of the joint sealant
- To install, compress backer-rod into the joint before sealants are applied
- Install backer-rod using a blunt probe or a plain-faced roller to force the rod to the desired depth.
- A template or roller gauge may be used to control the depth at which the rod is placed.
- DO NOT stretch backer-rod during installation but gently force into the joint so that the backer-rod fits tight against the sides of the joint.

APPROPRIATE BACKER-ROD SIZE

SIZING CLOSED-CELL BACKER-ROD

- For joint widths up to 19mm ($\frac{3}{4}$ "), the diameter of the rod should be 3 mm ($\frac{1}{8}$ ") larger than the width of the joint.
- For 19 mm ($\frac{3}{4}$ ") wide joints, use 25mm (1") diameter rod.

APPLICATION

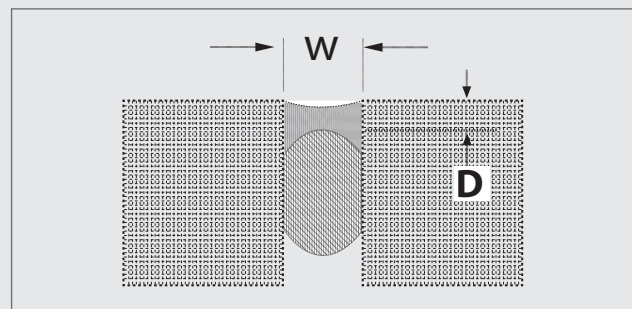

LOCATION

Al Waab City – Salwa Road, 1st Floor, Office No.A, Above HSBC Bank
P.O. Box: 23910 Doha-Qatar
Phone: Tel : +974 4451 3301/02/03
Fax: +974 4451 3305
Email: contact@unitech-qatar.com

